

SANYO

**Ultra Portable Multimedia
LCD Projector**

PLC-XU48

Made to Move

PLC-XU48



High-Resolution LCDs Brighten Up Your Presentations

Separate RGB Panels for Faithful Color Reproduction

The PLC-XU48 series employs three 0.79-inch polysilicon thin-film transistor LCD panels for projection of true XGA (1024 x 768) resolution images with a total of 2,359,296 pixels.

Bright Images Even In a Well-Lit Room

The PLC-XU48 series uses a 200-watt UHP lamp for outstanding brightness and well-balanced color reproduction.

Progressive Scan

A progressive scan circuit ensures superb, high-resolution video images.

User-Controllable 10-Bit Digital Gamma Correction

Select the most appropriate gamma correction mode from among Standard, Cinema, Real (for graphics) and four user settings.

3D AUCC for High-Resolution Images

The 3D Automatic Uniformity Correction Control (AUCC) circuit ensures a uniform projected image, balancing uneven color and brightness gradations for more natural image displays.

High-Quality UXGA/WXGA Compressed Projection with DRIT

SANYO's original Digital Realized Interpolation Technology (DRIT) enhances projected images, even if the resolution of the input signal differs from that of the LCD panels.

Projection Flexibility for Successful Presentations

Digital Keystone Correction

To compensate for keystone (trapezoidal) picture distortion, the PLC-XU48 series provides vertical keystone correction with a correction range up to $\pm 20^\circ$. Up/down correction range ($\pm 20^\circ$ maximum)
 On screen image size after correction is smaller than that of original. Correction range varies depending on operation settings such as lens shift ratio, lens zoom magnification and so on.



Light Weight and Compactness for Greater Portability

The compact design (298 x 71 x 213 mm) and lightweight body (2.7 kg) let you make presentations almost anywhere.

Digital and Optical Zooms Make Setting Up More Flexible

In addition to its 1.2x optical zoom, the PLC-XU48 series features a 1/2x to 16x digital zoom that lets you easily enlarge or reduce the screen display size as desired.

Dimmer Function to Optimize Lamp Brightness

In addition to Normal mode and Eco mode, the PLC-XU48 series offers Auto mode. Auto mode adjusts lamp brightness in response to the video signal to ensure high contrast for rich, deep blacks.

Fan Control System Reduces Unwanted Noise

The intelligent Fan Operation Linear Control System reduces cooling fan noise according to changes in temperature.

Blackboard (Green color) Mode


This mode lets you use a blackboard as a projection screen*. It adjusts the colors to make images look similar to those projection to an ordinary white screen. * For blackboard of green color only.

Security Functions

The PIN code lock function prevents others from operating the projector without inputting the correct PIN code. The key lock function, which is set from the operation menu, locks the operation of the top control and remote control buttons.

Two D-sub Input Terminals

These two terminals can be used for D-sub input, or one can be switched and used as a monitor out terminal.



Other Features

- Freeze function
- User logo function
- No show function
- Presentation timer
- Multilanguage menu display (12 languages)

Specifications

Model name	PLC-XU48
Panels	0.79-inch TFT p-Si x 3
No. of pixels	2,359,296 (1024 x 768 dots)
Projection lamp	200 W UHP 1.0 mm
Brightness (typical)	3000 lm
Contrast	450 : 1 (Lamp mode "AUTO")
Uniformity	85% (corner to center)
Projection lens	F1.7-2.1, f=26.7-32 mm
Screen size	33"-300" 1.3-10 m (100" at 3.3-4.0 m)
Zoom / Focus	1:1.2 Manual driven U:D= 9:1
HDTV signals	480i, 480p, 575i, 575p, 720p, 1035i, and 1080i
Color systems	PAL / SECAM / NTSC4.43 / PAL-M/N
Video signal	Composite, D-sub 15-pin for component
Video terminals	RCA : Video Mini-DIN 4-pin : S-Video 1-Input
Computer compatibility	UXGA / WXGA / SXGA / XGA / SVGA / VGA / MAC analog
Computer terminals	D-sub for Input, D-sub 15 pin for input or monitor out
Audio	RCA (L/R) for video input Mini-Jack (stereo) for computer input Mini-Jack (stereo) for output (variable)
Communication terminals	Service Port (RS-232C), USB type B
Presentation tools	Freeze / Digital Zoom / No Show / Page 1 / Etc
Other features	Progressive, 3-2 pull down, user logo
Scanning frequency	H sync: - 80 kHz, V sync: - 100 Hz, dot clock: 130 MHz
Sound output	1.0W Mono
Voltage	100 V-240 V AC (auto voltage)
Dimensions (W x H x D)	298 x 71 x 213 mm (not including adjustable feet)
Weight	2.7 kg (6.0 lbs)

* Design of the product, specifications are subject to change without notice.


Accessories

- Owner's Manual
- AC Power Cord
- Remote Control and Batteries
- VGA Cable
- Lens Cover with String and Screw
- PIN Code Label

Optional Accessories

- COMPONENT-VGA Cable POA-CA-COMPVGA
- SCART-VGA Cable POA-CA-SCART
- Laser Pointer Remote Control Unit POA-RCKIT03
- Presentation Kit POA-RCKIT04 (Presentation Remote Control with Mouse Control Function)

Approximate throw distance/picture size (1.2x zoom lens model)

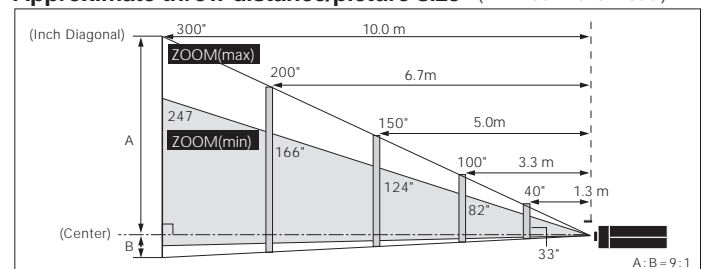

Screen Size (W x H) mm	33"	40"	100"	150"	200"	300"
4:3 aspect ratio	671 x 503	813 x 610	2032 x 1524	3048 x 2286	4064 x 3048	6095 x 4572
Zoom (min)	1.3m	1.6m	4.0m	6.1m	8.1m	—
Zoom (max)	—	1.3m	3.3m	5.0m	6.7m	10.0m

Approximate throw distances shown above were calculated on lens design specifications. Please note that up to 5% deviation may result due to lens variation.



Pixelworks ICs are used in this projector

Caution: Please consult the instruction manual to ensure safe and proper operation of the product.

Distributed by:



SANYO Electric Co., Ltd.
AV Solutions Company

©2005 SANYO Printed in Japan 2005.9. SI.

<http://www.sanyo-lcdp.com/english/>

SML058